

"SLASHBUSTER"®

XL 600

Excavator Mounted Brush Cutting Attachment

XL 600

General Specifications

- 60" cutting swath
- Recommended for standard or long front excavators
- Adaptable to 40,000 to 100,000-lb excavators
- Cuts and mulches trees to 6" diameter
- Standard automatic wire shear
- Standard rotating hub debris guard
- Standard blade bar cutter
- 2,000-lb. to 2,500-lb. total weight*

XL 600

Available Options

- Available to operate with standard excavator bucket thumb
- Available with tilt mounting
- Available to match bucket quick disconnects
- "VCP" (vegetation control package)

XL 600


Basic Installation Requirements:

- Hydraulic:**
 - Continuous service priority flow circuit required
 - 4,500 PSI maximum hydraulic pressure
 - "SLASHBUSTER"® equipment is provided with integral crossport relief and anti cavitation check valves
- Electric:**
 - 20 AMP auxiliary circuit recommended
 - Foot-operated master On-Off switch recommended

Note: It is recommended that the excavator is provided with a hinged front screen guard for the front of the cab that meets or exceeds SAE J1084 specs



Standard blade bar

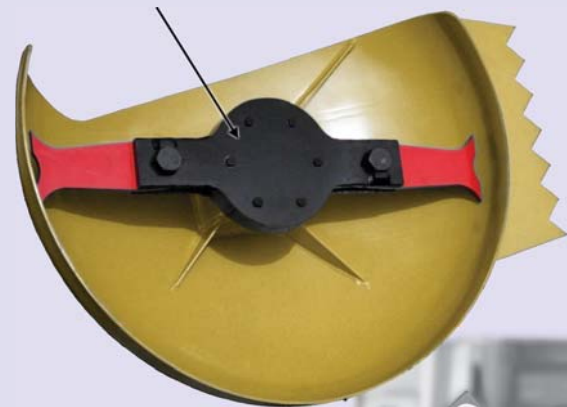

OPTIONAL TILT MOUNT
tilts 45 degrees
either side of center

"SLASHBUSTER"®

EQUIPMENT

Unmatched in Performance,
Reliability and Output



D&M Machine Division, Inc.

12 Monte-Brady Road Montesano, WA 98563
(360) 249-3366

email: info@slashbuster.com
www.slashbuster.com

Exclusive Manufacturer of "SLASHBUSTER"® Equipment

THIS EQUIPMENT IS PROTECTED BY ONE OR MORE OF THE FOLLOWING PATENTS: 4,769,977; 5,103,882; 5,201,350; 5,329,752; 5,408,814; S/N 08/720,536; AUSTRALIAN PATENTS: 600716; 618679; 652131; 654411; 665724; CANADIAN PATENTS: 1,281,908; 2,084,971; NEW ZEALAND PATENTS: 245249; 270419; EUROPEAN PATENT 0298977, REGISTERED IN GB, FR, IT, CH, NL, BE (298977E), DE (37793098), AT (0076250E), SE (879019487); AND PATENTS PENDING IN THE UNITED STATES, AUSTRALIA, CANADA, EUROPE, FINLAND AND NEW ZEALAND.